

# MaxiPass® L


**Low Flow, Full Cone, Maximum Free Passage**

## DESIGN FEATURES


- 1/8 and 1/4 pipe connection sizes
- Ultimate clog-resistant design, with the **largest free passage available** in an axial, full-cone nozzle
- Unique, S-shaped internal vanes allow free passage of particles
- High-energy efficiency
- Easily handles dirty, contaminated liquids
- Male connections
- Nozzle body available in Brass, 303, 316 Stainless Steel
- Vanes are 316 Stainless Steel for optimum wear and corrosion resistance

## SPRAY CHARACTERISTICS

- High reliability spray performance under the most difficult conditions
  - Uniform spray distribution
- Spray pattern:** Full Cone  
**Spray angles:** Narrow (N), Medium (M), Wide (W)  
**Flow rates:** 0.12 to 2.03 gpm

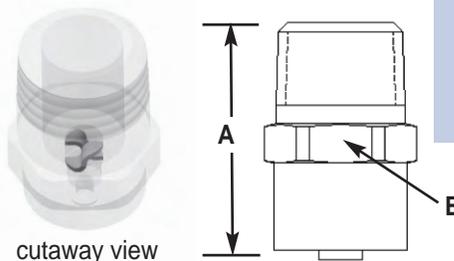

FULL CONE

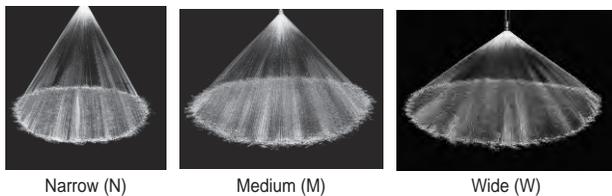

| MaxiPass L Ordering Nomenclature |        |             |                       |
|----------------------------------|--------|-------------|-----------------------|
| pipe connection size             | 1/8    | MPL0.21M    | -B - 316              |
|                                  | series | flow rating | material              |
|                                  |        |             | BSP thread connection |
|                                  |        |             | spray angle           |

## MaxiPass L (MPL) Flow Rates

| Male Pipe Size | K Factor | Nozzle Number | GALLONS PER MINUTE @ PSI |        |        |        |        |        |        |        |
|----------------|----------|---------------|--------------------------|--------|--------|--------|--------|--------|--------|--------|
|                |          |               | 10 PSI                   | 20 PSI | 30 PSI | 40 PSI | 50 PSI | 60 PSI | 70 PSI | 80 PSI |
| 1/8            | 0.043    | MPL0.21       | 0.12                     | 0.16   | 0.19   | 0.21   | 0.23   | 0.25   | 0.27   | 0.28   |
|                | 0.061    | MPL0.30       | 0.17                     | 0.22   | 0.27   | 0.30   | 0.33   | 0.36   | 0.38   | 0.40   |
|                | 0.086    | MPL0.42       | 0.23                     | 0.31   | 0.37   | 0.42   | 0.46   | 0.50   | 0.53   | 0.57   |
|                | 0.117    | MPL0.57       | 0.31                     | 0.42   | 0.51   | 0.57   | 0.63   | 0.68   | 0.73   | 0.77   |
| 1/4            | 0.158    | MPL0.77       | 0.42                     | 0.57   | 0.68   | 0.77   | 0.85   | 0.92   | 0.98   | 1.04   |
|                | 0.229    | MPL1.12       | 0.62                     | 0.83   | 0.99   | 1.12   | 1.23   | 1.33   | 1.42   | 1.51   |
|                | 0.309    | MPL1.51       | 0.83                     | 1.12   | 1.33   | 1.51   | 1.66   | 1.80   | 1.92   | 2.03   |

Flow Rate (GPM) = K (PSI)<sup>0.43</sup>

## Spray Angle and Dimensions

| Nozzle Number | N spray angle | M spray angle | W spray angle | Approx. Free Passage Dia. (in.) |       |       | Approx. Dimensions (in.) |            | Wt. (oz) Metal |
|---------------|---------------|---------------|---------------|---------------------------------|-------|-------|--------------------------|------------|----------------|
|               | 40 PSI        | 40 PSI        | 40 PSI        | N                               | M     | W     | A length                 | B hex size |                |
| MPL0.21       | 51            | 77            | 129           | 0.037                           | 0.036 | 0.036 | 0.70                     | 7/16       | 0.30           |
| MPL0.30       | 53            | 86            | 134           | 0.043                           | 0.039 | 0.044 |                          |            |                |
| MPL0.42       | 51            | 90            | 128           | 0.053                           | 0.047 | 0.044 |                          |            |                |
| MPL0.57       | 61            | 92            | 127           | 0.06                            | 0.057 | 0.052 |                          |            |                |
| MPL0.77       | 62            | 90            | 125           | 0.067                           | 0.067 | 0.067 | 0.88                     | 9/16       | 0.62           |
| MPL1.12       | 60            | 92            | 124           | 0.085                           | 0.081 | 0.081 |                          |            |                |
| MPL1.51       | 70            | 97            | 123           | 0.105                           | 0.09  | 0.09  |                          |            |                |

Spray angle performance varies with pressure. Contact BETE Applications Engineering for specific data on critical applications.

Dimensions are approximate. Check with BETE for critical dimension applications.