

# TF

## Wide Range of Flows and Angles

### DESIGN FEATURES

- The original spiral nozzle invented by BETE and continuously improved!
- High energy efficiency
- One-piece/no internal parts
- Clog-resistant performance
- High discharge velocity
- Male connection standard; female connection available by special order

### SPRAY CHARACTERISTICS


- Wide range of flow rates and spray angles
- Fine atomization

**Spray patterns:** Hollow Cone

For Full Cone, see page 28

**Spray angles:** 50° to 180°

**Flow rates:** 2.26 to 10700 L/min  
(Higher flow rates available)

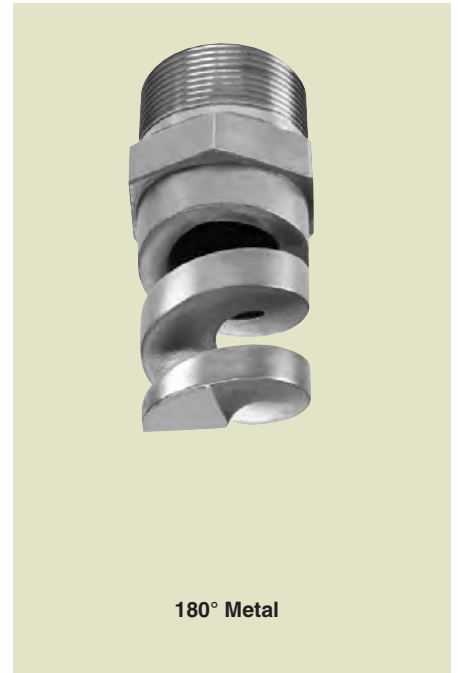


HOLLOW CONE




Hollow Cone 50° (N)



Hollow Cone 120° (W)



Hollow Cone 180° (XW)

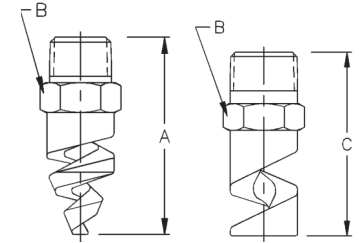

50°, 60°, 90°, 120°

180°

Dimensions are approximate. Check with BETE for critical dimension applications

### TF Hollow Cone Flow Rates and Dimensions

Hollow Cone, 50° (N), 60° (V), 90° (M), 120° (W), and 180° (XW) Spray Angles, 1/4" to 4" Pipe Sizes, BSP or NPT

Male Pipe Size	Nozzle Number	Available Spray Angles					K Factor	LITERS PER MINUTE @ BAR					PTFE not recommended at pressures above red line			Approx. (mm)		Dim. (mm) for Metal Only*			Wt. (g)			
		50°	60°	90°	120°	180°		0.5 bar	0.7 bar	1 bar	2 bar	3 bar	5 bar	10 bar	20 bar	Orif. Dia.	Free Pass. Dia.	A	B	C	180° Metal	Plas.		
1/4	TF6	50°	60°	90°	120°	180°	3.19	2.26	2.67	3.19	4.5	5.5	7.1	10.1	14.3	2.38	2.38	42.9	14.3					
	TF8	50°	60°	90°	120°	180°	5.93	4.19	4.96	5.93	8.4	10.3	13.2	18.7	26.5	3.18	3.18	47.6	14.3	47.6	35	21		
	TF10	50°	60°	90°	120°	180°	9.12	6.45	7.63	9.12	12.9	15.8	20.4	28.8	40.8	3.97	3.18	47.6	14.3	47.6				
3/8	TF12	50°	60°	90°	120°	180°	13.7	9.7	11.4	13.7	19.3	23.7	30.6	43.2	61.1	4.76	3.18							
	TF14	50°	60°	90°	120°	180°	18.5	13.1	15.4	18.5	26.1	32.0	41.3	58.4	82.6	5.56	3.18	47.6	17.5 <sup>1</sup>	47.6	50	21		
	TF16	50°	60°	90°	120°	180°	24.2	17.1	20.2	24.2	34.2	41.8	54.0	76.4	108	6.35	3.18							
1/2	TF20	50°	60°	90°	120°	180°	37.6	26.6	31.5	37.6	53.2	65.1	84.1	119	168	7.94	3.18							
	TF24	50°	60°	90°	120°	180°	54.9	38.8	46.0	54.9	77.7	95.1	123	174	246	9.53	4.76	63.5	22.2	60.5	85	25		
3/4	TF28	50°	60°	90°	120°	180°	75.2	53.2	62.9	75.2	106	130	168	238	336	11.1	4.76							
	TF32	50°	60°	90°	120°	180°	95.7	67.7	80.1	95.7	135	166	214	303	428	12.7	4.76	69.9	28.6	76.2	85	28		
1	TF40	60°	90°	120°	180°		153	108	128	153	216	264	341	483	683	15.9	6.35	92.1	34.9	92.2	425	85		
	TF48	60°	90°	120°	180°		217	153	181	216	306	375	484	685	968	19.1	6.35							
1 1/2	TF56	60°	90°	120°	180°		294	208	246	294	416	509	657	930	1320	22.2	7.94							
	TF64	60°	90°	120°	180°		385	272	322	385	545	667	861	1220	1720	25.4	7.94	111	50.8	111	851	170		
	TF72	60°	90°	120°	180°		438	309	366	438	619	758	978	1380	1960	28.6	7.94							
2	TF88	60°	90°	120°	180°		638	451	534	638	902	1110	1430	2020	2850	34.9	11.1	143	63.5	127	1300	227		
	TF96	60°	90°	120°	180°		806	570	674	806	1140	1400	1800	2550	3600	38.1	11.1	176	63.5	127	1530	255		
3	TF112	60°	90°	120°			1170	825	976	1170	1650	2020	2610	3690	5220	44.5	14.3	219	88.9					
	TF128	60°	90°	120°			1550	1090	1290	1550	2190	2680	3460	4891	6920	50.8	14.3							
4	TF160	60°	90°	120°			2390	1690	2000	2390	3380	4140	5350	7570	10700	63.5	15.9	257	114					

Flow Rate ( $l_{\min}$ ) =  $K \sqrt{\bar{p}}$  \*Dimensions are for bar stock, cast sizes may vary. <sup>1</sup> 25.4 mm for 180°

Standard Materials: Brass, 316 Stainless Steel, PVC, Polypropylene, and PTFE (Poly. not available for TF6 - TF10)

Spray angle performance varies with pressure. Contact BETE for specific data on critical applications.